


	A	B	C	D	E	Pde
<b>U4-8C / U4-8CW</b>	212 mm	198 mm	70 mm		29 mm	14 W
<b>U12C / U12CW</b>	212 mm	267 mm	70 mm		29 mm	22 W
<b>U18C / U18CW</b>	212 mm	378 mm	70 mm		29 mm	22 W
<b>U24C / U24CW</b>	336 mm	267 mm	70 mm	125 mm	29 mm	24 W
<b>U36C / U36CW</b>	462 mm	267 mm	70 mm	125 mm	29 mm	26 W



	A	B	C	D	E	Pde
<b>N4-8C / N4-8CW</b>	236 mm	215 mm	112 mm	107 mm	108 mm	14 W
<b>N12C / N12CW</b>	236 mm	287 mm	112 mm	107 mm	180 mm	22 W
<b>N18C / N18CW</b>	236 mm	396 mm	112 mm	107 mm	289 mm	22 W
<b>N24C / N24CW</b>	361 mm	287 mm	112 mm	232 mm	180 mm	24 W
<b>N36C / N36CW</b>	482 mm	287 mm	112 mm	357 mm	180 mm	26 W
<b>N48C / N48CW</b>	653 mm	287 mm	112 mm	482 mm	180 mm	28 W

Temperature range: -25°C ... +60 °C, Rating Voltage: AC 400 V, According to: IEC 60670

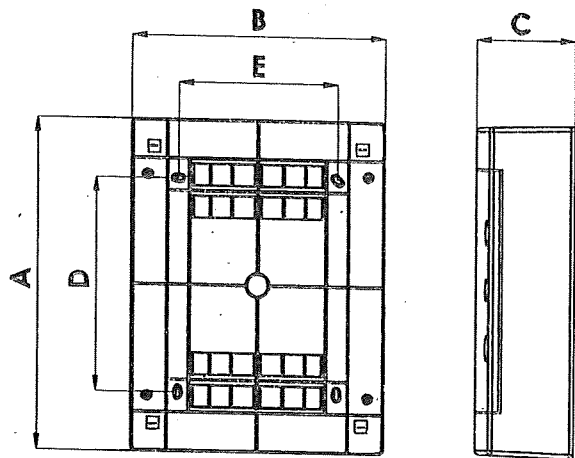